




F16.2

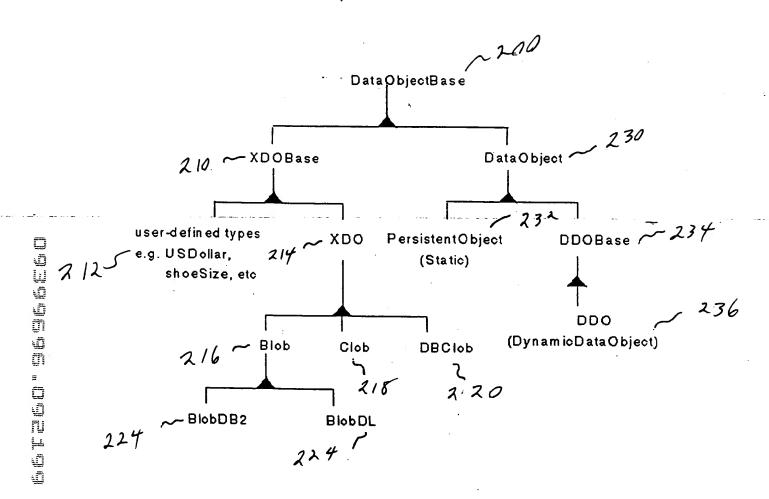


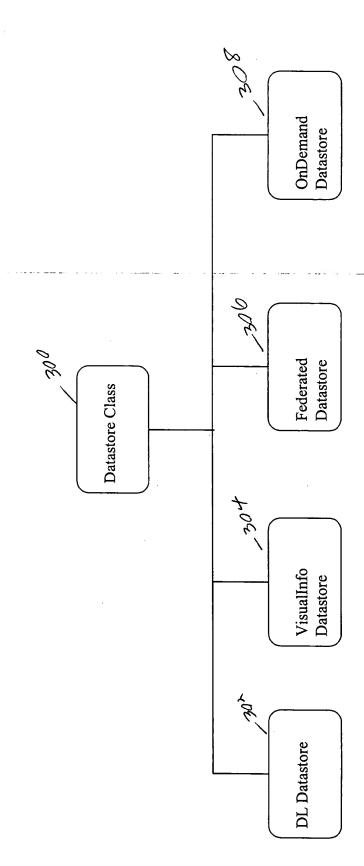

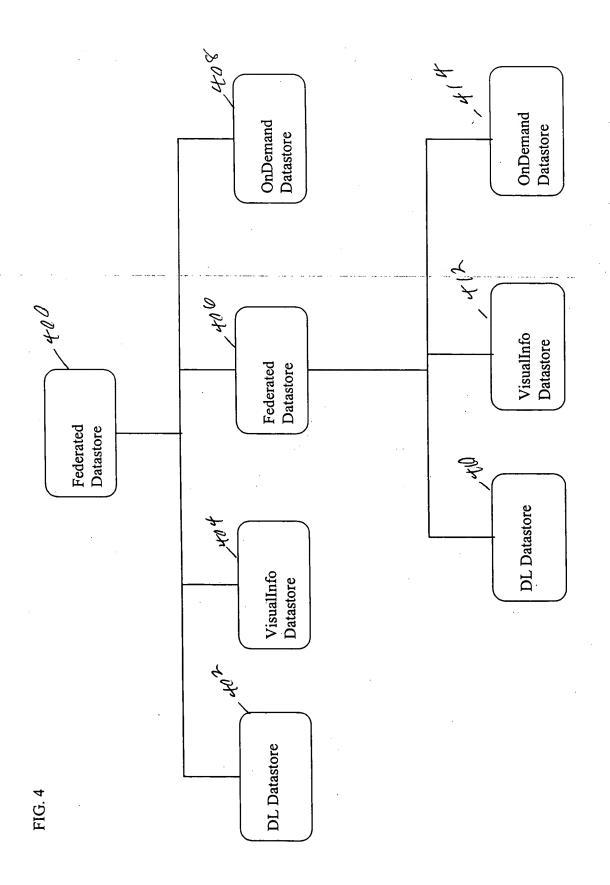

Delegato Delegatos

F16.7

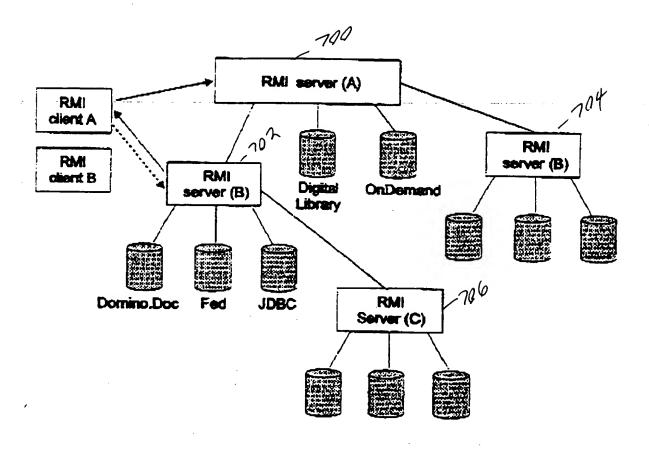





Initially, configure one or more RMI servers, wherein each is a master RMI server.


-802

For each master RMI servers, upon receiving a request to add another RMI server, dynamically connect the other RMI server to an existing server within a RMI server hierarchy based on factors, such as a number of connections of the existing server.

804

Upon receiving a request to delete a RMI server, dynamically delete the RMI server from the RMI server hierarchy.



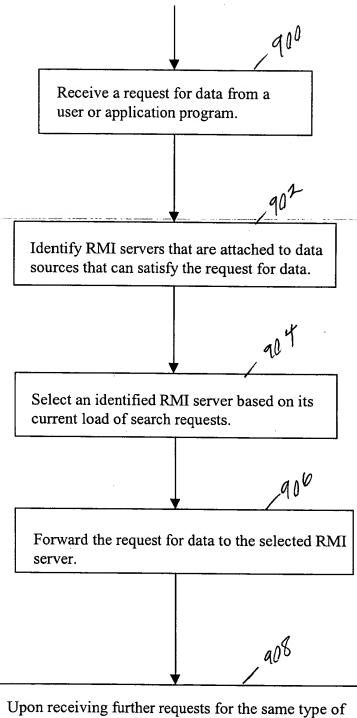

Upon receiving further requests for the same type of data from the same user or application, forward request to the previously selected RMI server.